

Job Name		Engineer / Architect	
Job Location		Wholesaler	
Submittal Date		Contractor	

## V8-\*\*\*A Speedi Plumb® Vinyl Faucet Connectors - Female Iron Pipe Inlet

**Use:** For use in potable water distribution systems in accessible locations only

**Design Features:**

- **No kink hose.** The specially engineered reinforced PVC hose provides unique flexibility to prevent kinking and crimping
- **Strong & durable** with a tighter weave and two-layer bonded construction, outperforms conventional vinyl connectors
- **Longer wing nuts** ease installation for speedier connections
- **Rubber washers** provide a large pliable sealing surface and ensures a long lasting water tight connection
- **8-sided pneumatic crimp** provides greater dependability for reliable nut-to-hose connections




**Operating Specifications:**

**Temperature:** 40°- 160° F, intermittent to 180° F

**Pressure:** 125 PSI maximum

**Tubing Diameter:** 0.300" ID (0.500" OD)

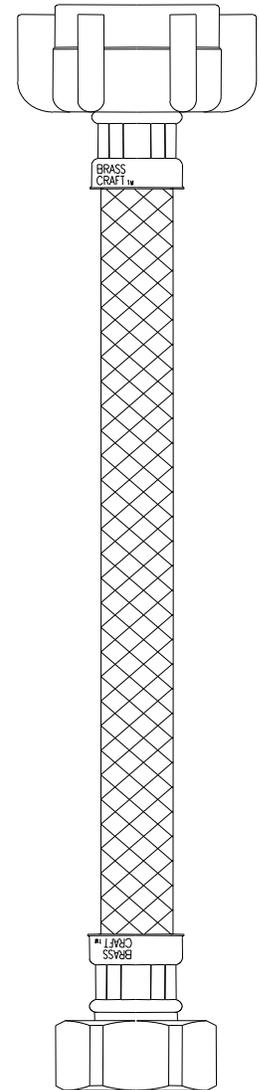

**CONNECTOR MATERIAL SPECIFICATIONS**


<b>Hose</b>	PVC with polyester braid reinforcement
<b>Barb</b>	Brass
<b>Ferrule</b>	Steel, zinc plated
<b>Nut</b>	Brass, plated or polypropylene
<b>Washer</b>	Rubber

**Part Listing:**

- V8-12A F 1/2" FIP x 1/2" FIP x 12" length
- V8-12AM F 1/2" FIP x 1/2" FIP metal nut x 12" length
- V8-16A F 1/2" FIP x 1/2" FIP x 16" length
- V8-16AM F 1/2" FIP x 1/2" FIP metal nut x 16" length
- V8-20A F 1/2" FIP x 1/2" FIP x 20" length
- V8-20AM F 1/2" FIP x 1/2" FIP metal nut x 20" length
- V8-36A F 1/2" FIP x 1/2" FIP x 36" length
- V8-36AM F 1/2" FIP x 1/2" FIP metal nut x 36" length

*This specification and all information contained herein is the confidential and exclusive property of Brasscraft Manufacturing Company and shall not be disclosed to others without the written consent of Brasscraft Mfg. Co. This specification must be returned to Brasscraft Mfg. Co. if requested.*

# V8-\*\*A Speedi Plumb® Vinyl Faucet Connectors - Female Iron Pipe Inlet

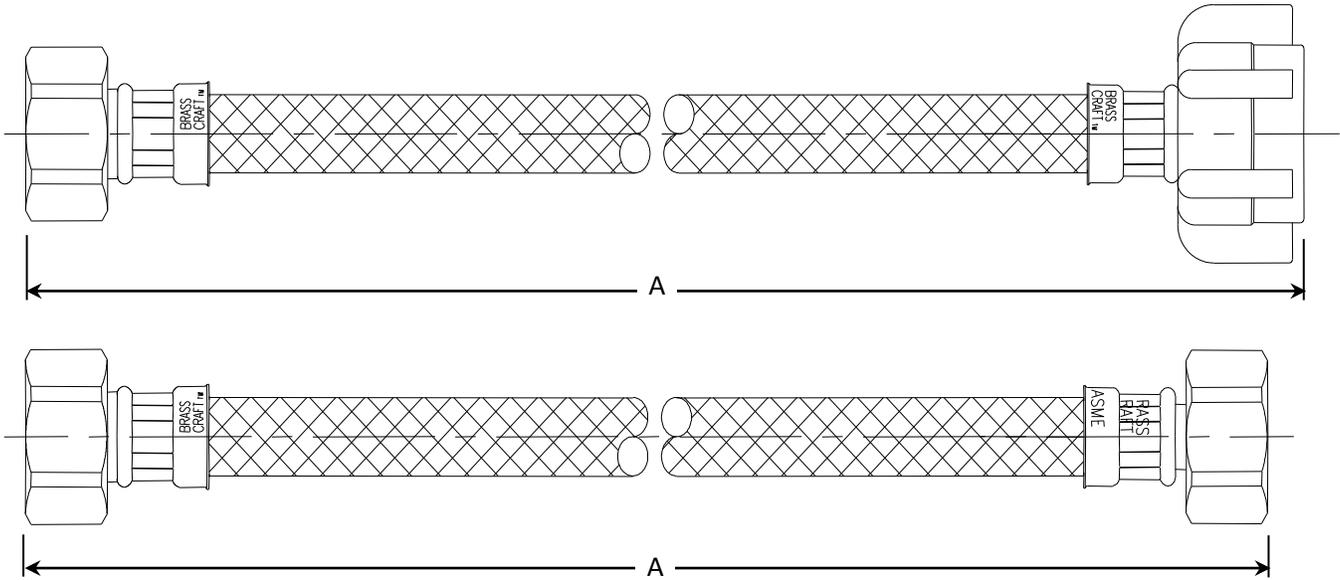

<b>PART DIMENSIONS (Inches)</b>	
<b>Model</b>	<b>DIM. A</b>
V8-12A	12.00 / 13.00
V8-12AM	12.00 / 13.00
V8-16A	16.00 / 17.00
V8-16AM	16.00 / 17.00

<b>PART DIMENSIONS (Inches)</b>	
<b>Model</b>	<b>DIM. A</b>
V8-20A	20.00 / 21.00
V8-20AM	20.00 / 21.00
V8-36A	36.00 / 37.00
V8-36AM	36.00 / 37.00

**Listings & Certifications:**

- IAPMO listed to ASME A112.18.6 and CSA B125.6 (includes NSF/ANSI372 and NSF61)



*This specification and all information contained herein is the confidential and exclusive property of Brasscraft Manufacturing Company and shall not be disclosed to others without the written consent of Brasscraft Mfg. Co. This specification must be returned to Brasscraft Mfg. Co. if requested.*

**BrassCraft®**