


Submitted Model No.: **Specific Features:**



▲ Designate proper finish suffix

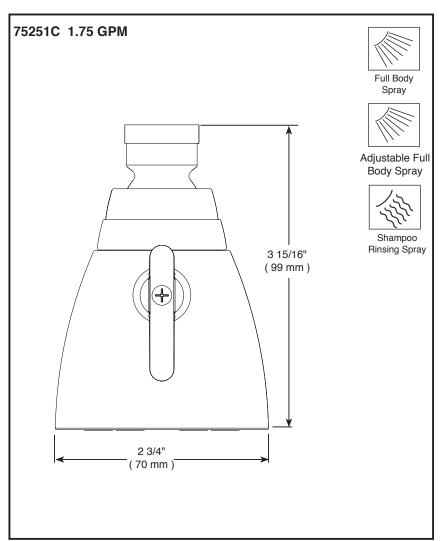

see what Delta can do

SHOWER HEAD

■ 3-Spray Setting Shower Head

STANDARD SPECIFICATIONS:

- Maximum 1.75 gpm @ 80 psi, 6.6 L/min @ 550 kPa
- 1/2" metal ball connector
- 6 spray jets with adjustable sprays and metal ball connector
- Lever control knob to adjust water velocity
- Shower head with three settings
- The ball swivel angle is 16° (8° per side)

WARRANTY

- Parts and Finish Lifetime limited warranty; or for commercial purchasers, 10 years for multi-family residential (apartments and condominiums) and 5 years for all other commercial uses, in each case from the date of purchase.
- Electronic Parts and Batteries (if applicable) 5 years from the date of purchase; or for commercial purchasers, 1 year from the date of purchase. No warranty is provided on batteries.



COMPLIES WITH

- ASME A112.18.1 / CSA B125.1
- EPA WaterSense®