
PRODUCT SPECIFICATION DRAWING HOLDRITE® #270 Acoustical Isolation Liner

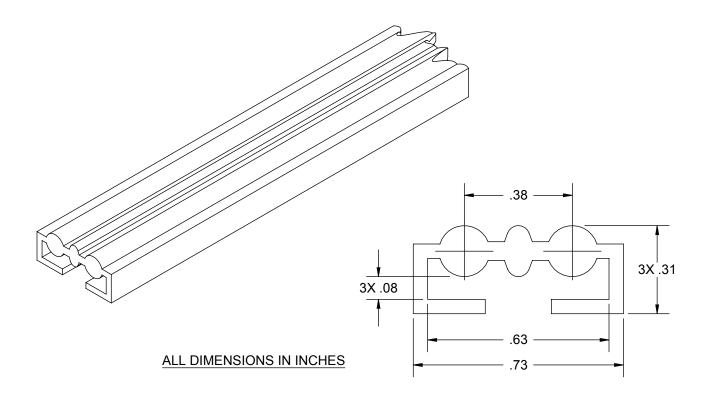

Engineered sound insulation lining, minimizes the occurrence of frictional noises caused by thermal expansion of the pipes and protects against contact between dissimilar materials. Attaches to ends of HOLDRITE Stout Brackets™ or around pipes to provide isolation from structure. Also provide sound isolation between metal loop hangers and piping. Available in 50' rolls.

Product Information: Material: TPE, 45 shore A, color white		SULAL ISO Certified Lab SULATION	
• Temperature range: -30 °F to 180 °F		Product Submittal Job Name: Date:	
	THIS INFORMATION IS PROPRIETARY TO HOLDRITE AND IS SUBJECT TO CHANGE	Part Number: Architect / Owner:	Qty:
WITHOUT NOTICE. IT MAY NOT BE REPRODUCED IN PART OR WHOLE WITHOUT WRITTEN AUTHORIZATION.		Contractor:	
800	CONVERTING MAKESHIFT METHODS INTO ENGINEERED SOLUTIONS ⁶⁴ -321-0316 OR 760-744-6944 / FAX: 760-744-0507 / WWW.HOLDRITE.COM spec 270A RevE	M	