



SYMMONS® DS Creations


the smart choice™

SLW-0600-12-1.0-ADA
(CDSLW0600-12-1.0-ADA)
Two Handle Widespread Lavatory Faucet
Installation Guide



Model Numbers	Specification
<input type="checkbox"/> SLW-0600-12-1.0-ADA <i>Two Handle Widespread Lavatory Faucet</i> <input type="checkbox"/> SLW-0600-12-1.0-ADA-TRM <i>Two Handle Widespread Lavatory Faucet Trim</i> <input type="checkbox"/> SLW-0600-BODY <i>Widespread Valve Body Assembly</i>	Two Handle Widespread Lavatory Faucet (with widespread valve body assembly) featuring 8"-16" mount shall include quarter turn ceramic cartridges, 1/2" IPS inlet connections, metal drain assembly and 1.0 gpm (3.8 L/min) aerator. Faucet shall be made from metal construction, plated in standard polished chrome finish.
Warranty	Compliance
<p>Limited Lifetime - to the original end purchaser in consumer/residential installations. 5 Years - for industrial/commercial installations. Refer to www.symmons.com/warranty for complete warranty information.</p>	<p>-ASME A112.18.1/CSA B125.1 -NSF/ANSI 61.9, NSF/ANSI 372 -WaterSense 1.0 gpm (3.8 L/min) for SLW-0600-12-1.0-ADA only</p>  


Dimensions

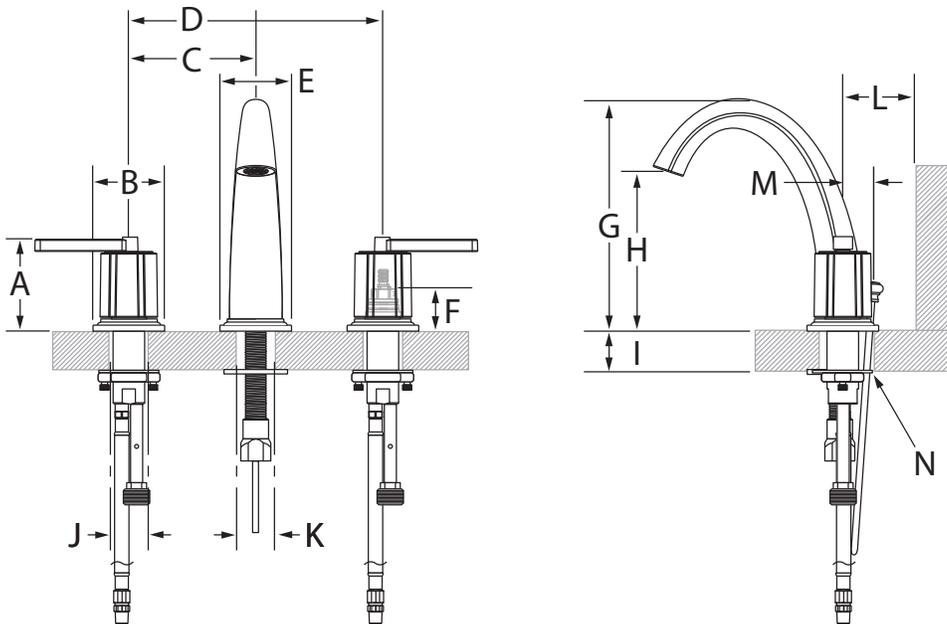

Measurements	
A	(2x) 2-15/16", 75 mm
B	Ø 2-1/4", 57 mm
C	4", 102 mm
D	8", 203 mm
E	Ø 2-1/4", 57 mm
F	1-5/16", 33 mm
G	7-1/4", 184 mm
H	5", 127 mm
I	Deck Thickness Ref. Max. 1-13/16", 46 mm
J	(2x) Hole Size Ø 1-1/4", 32 mm
K	Hole Size Ø 1-1/4", 32 mm
L	Min. 2-1/4", 57 mm
M	3/4", 19 mm
N	Hole Size Ø 3/4", 19 mm

Note: Dimensions subject to change without notice.

Parts Breakdown

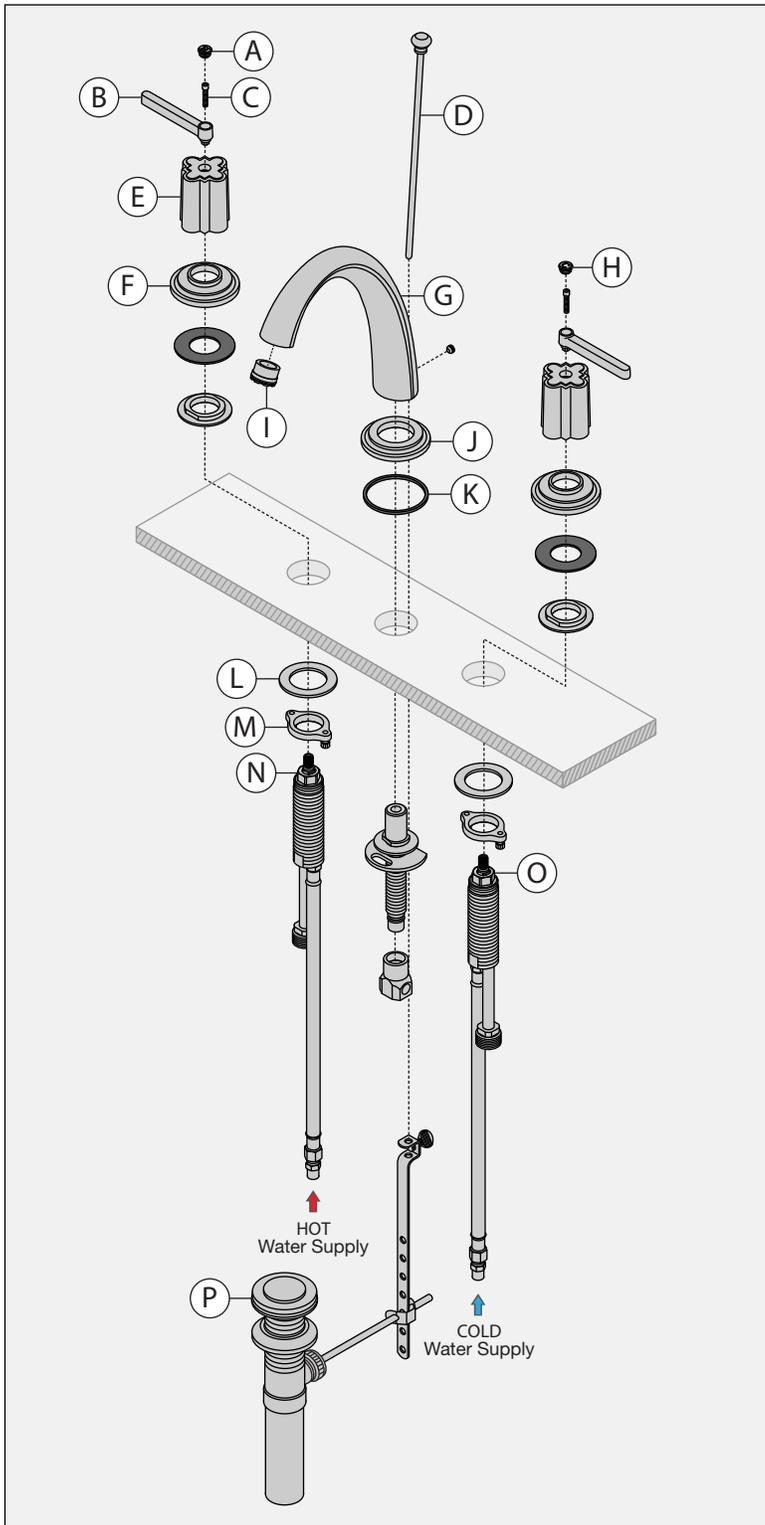

Replacement Parts

Item	Description	Part Number
A	Hot Plug Button	RL-310
H	Cold Plug Button	
B	(2x) Handle Blade	RL-313
C	(2x) Set Screw	
D	Lift Rod	P-108CL
E	(2x) Handle	RL-311
F	Handle Escutcheon	RL-312
I	Aerator (1.0) Aerator (1.5)	FLR-130-1.0-KIT FLR-130-1.5-KIT
L	Mounting Washer	
M	Mounting Nut	RL-187
N	Hot Cartridge	KN-114
O	Cold Cartridge	KN-113
P	Metal Drain	RL-154LR

Tools Required for Installation

Adjustable Wrench	
Allen Wrench: Handle (3 mm)	
Phillips Head Screwdriver	
Plumer Putty	
Plumber Tape	
Silicone	

Notes:

- 1) Apply a bead of silicone around the perimeter of trim installed flush to sink.
- 2) Apply plumber tape to all threaded connections.

WARNING: This product can expose you to chemicals including lead, which is known to the state of California to cause cancer, birth defects, or other reproductive harm. For more information, go to www.P65Warnings.ca.gov.