Location:



Euro-Flo™ Hand Shower, H325-V, H305-V Specification Submittal

Model Numbers

П

- H325-V Hand shower, SC-127 with 30 inch vertical bar, wall connection and flange
- H305-V Hand shower, SC-127 with wall mounted cradle, wall connection and flange

Options / Modifications

Append appropriate -suffix to model number.

- □ **/** -1.5 1.5 gpm (5.7 L/min) flow restrictor
 - -36 36 inch vertical bar in place of 30" inch bar, (model H325-V only)
 - -48 48 inch vertical bar in place of 30"inch bar, (model H325-V only)
- □ -QD Quick-disconnect for hand shower
- □ -L/HD Less hand shower wand
- □ -R White vinyl hose in place of metal hose
 - -72 6 foot hose in place of 5 foot hose



Feature Highlights

- Euro-Flo[™] five function hand shower with full shower pulsating message and soft shower water saving spray head
- 5 foot flexible metal hose with in-line vacuum breaker
- Hand shower flow rate 2.5 gpm (9.5 L/min)
- 30 inch (762 mm) vertical bar with adjustable slide (model H325-V only)
- Polished chrome finish (standard)

Finish Options / Modifications

Append appropriate -suffix to model number.


- □ -STN Satin nickel
 - Polished chrome (standard finish)

Standards / Certifications

ASME A112.18.1-2005/CSA B125.1-05

Warranty

- Limited Lifetime to the original end purchaser in residential / consumer installations
- 5 years for commercial installations

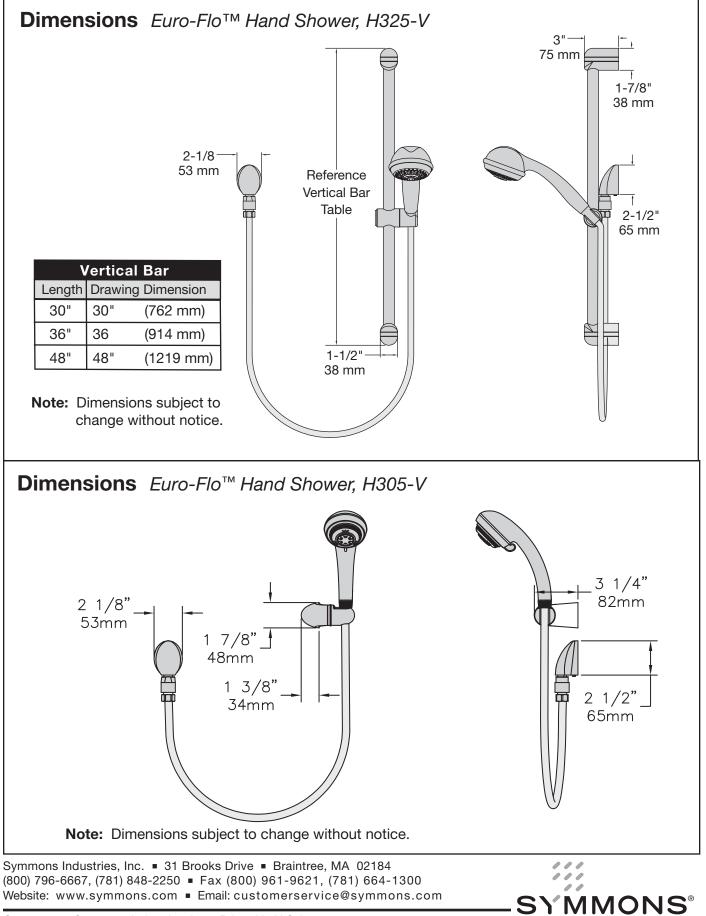

©2009-2014 Symmons Industries, Inc. Printed in U.S.A. • 041514

the smart choice™