




Z1204-H

ADJUSTABLE VERTICAL SIPHON JET HUB & SPIGOT

SPECIFICATION SHEET

TAG _____

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

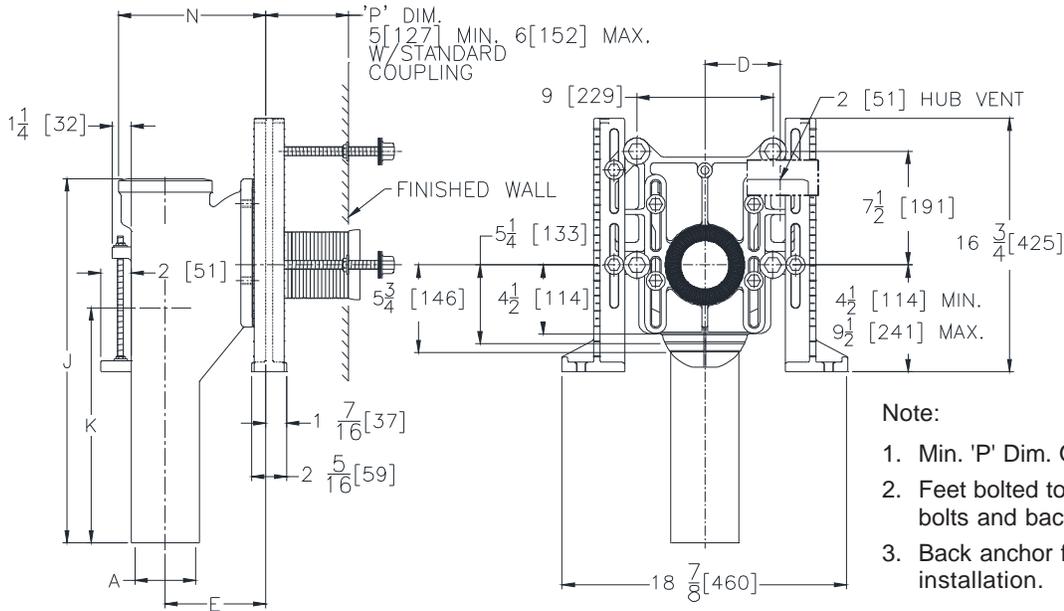

Note:

1. Min. 'P' Dim. Obtainable=2 [51]
2. Feet bolted to floor using min. 1/2 [13] dia. bolts and back slots on carrier feet.
3. Back anchor foot required for secure installation.

Product Number	Dimensions In Inches [mm]						Approx. Wt. Lbs. [kg]
	A	D	E	J	K	N	
Z1204-H4	4 [102]	5 [127]	6-5/8 [168]	24 [610]	15-1/2 [394]	9-3/4 [248]	90 [41]

ENGINEERING SPECIFICATION: ZURNZ1204-H() Adjustable, vertical siphon jet water closet "Rigid System" with () size Hub and Spigot connections and () side inlets. Complete with Dura-Coated cast iron right hand or left hand main fitting, with 2" [51mm] vent, adjustable gasketed faceplate, universal floor mounted foot supports, corrosion resistant adjustable polymer coupling with integral test cap, fixture bolts, trim, and stud protectors. Rear anchor tie down and bonded "Neo-Seal" gasket.

OPTIONS (Check/specify appropriate options)

___ Z1204-H4 Hub/Spigot Stack, Single Inlet, 2 [51] Right Hand Vent

PREFIXES

___ Z D.C.C.I. System with Zurn "ZZ" Adjustable Coupling*
 ___ ZQ D.C.C.I. System with NPT Face Plate, Non-Adjustable Coupling

SUFFIXES

- | | |
|--|--|
| ___ -A Auxiliary Support Assembly (For P-Dim. Greater than 18 [457]) | ___ -PS Pre-Fab Slotted Foot |
| ___ -B Blowout Type Fixture Support | ___ -RYK Unistrut Pre-Fab Foot |
| ___ -CC Corrosion Resistant Cast Iron Coupling (6 to 12 [152] to [305]) | ___ -VP Vandal-Proof Trim |
| ___ -CL Coupling Length Greater than 12 [305] (Specify Length Required.) | ___ -X3 3 [76] Foot Extension |
| ___ -F Floor Mount, Back Outlet Fixture Support | ___ -X4 4 [102] Foot Extension |
| ___ -JJ Two 2 [51] Auxiliary Inlets | ___ -45 Finishing Frame for Siphon Jet System (For Blowout System Specify -45-B) |
| ___ -JL 2 [51] Left-Hand Auxiliary Inlet | ___ -50 Flush Valve Supply Support for W.C. |
| ___ -JR 2 [51] Right-Hand Auxiliary Inlet | |
| ___ -M Auxiliary Foot Support (For P-Dim. 10-18 [254-457]) | |
| ___ -PF Pre-Fab Foot | |

* Regularly furnished unless otherwise specified.