



Location:

# 1 Mode Hand Shower Unit

## H321-V, H301-V

### Specification Submittal

#### Feature Highlights

- 1 mode hand shower unit
- 2-3/4" diameter
- Dual checks for backflow protection
- 30" slide bar with cradle for hand shower mounting (model H321-V)
- Cradle for hand shower mounting (model H301-V)
- Standard flow rate is 2.5 gpm (9.5 L/min)  
*Optional lower flow rate restrictor available*
- Polished chrome finish (standard)

#### Model Numbers

- H321-V Hand Shower with slide bar
- H301-V Hand Shower without slide bar for mounting to the wall


#### Standards / Certifications

-ASME A112.18.1/CSA B125.1



#### Warranty

- Limited Lifetime - to the original end purchaser in consumer installations
- 5 years - for commercial installations

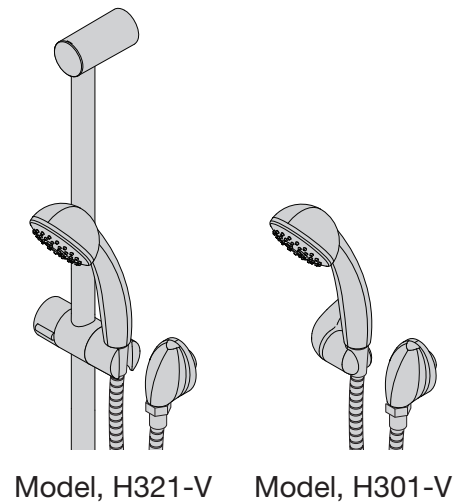

#### Options / Modifications

*Append appropriate -suffix to model number.*

- CG** -1.5 1.5 (5.7 L/min) flow rate restrictor
- 2.0 2.0 (7.6 L/min) flow rate restrictor
- L/HS Hand Shower wand not included (includes hose, in-line vacuum breaker, wall connections and cradle only)
- R Vinyl hose in place of flexible metal hose
- 72 6 foot hose in place of standard 5 foot hose
- QD Quick-disconnect at hand shower wall connection
- 48 48 inch vertical bar instead of 30 inch (model H321-V only)

#### Finish Options / Modifications


*Append appropriate -suffix to model number.*

- BBZ Brushed Bronze finish
- MB Matte Black finish
- STN Satin Nickel finish
- Polished chrome (standard finish)


## Dimensions *Hand Shower, H321-V*

Vertical Bar	
Length	Drawing Dimension
30"	30" (762 mm)
48"	48" (1219 mm)

**Note:** Dimensions subject to change without notice.

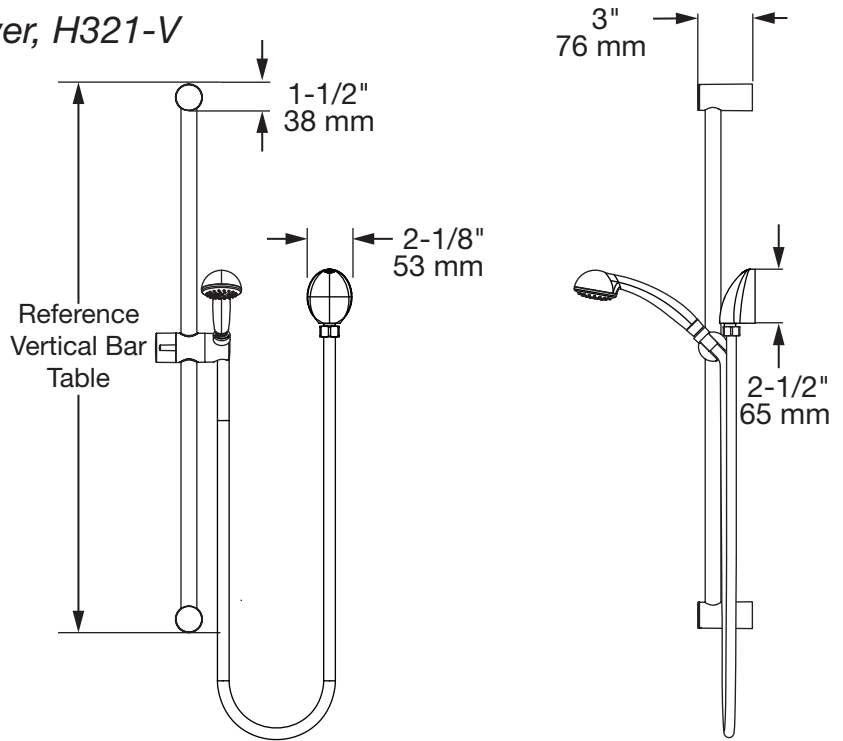

## Dimensions *Hand Shower, H301-V*

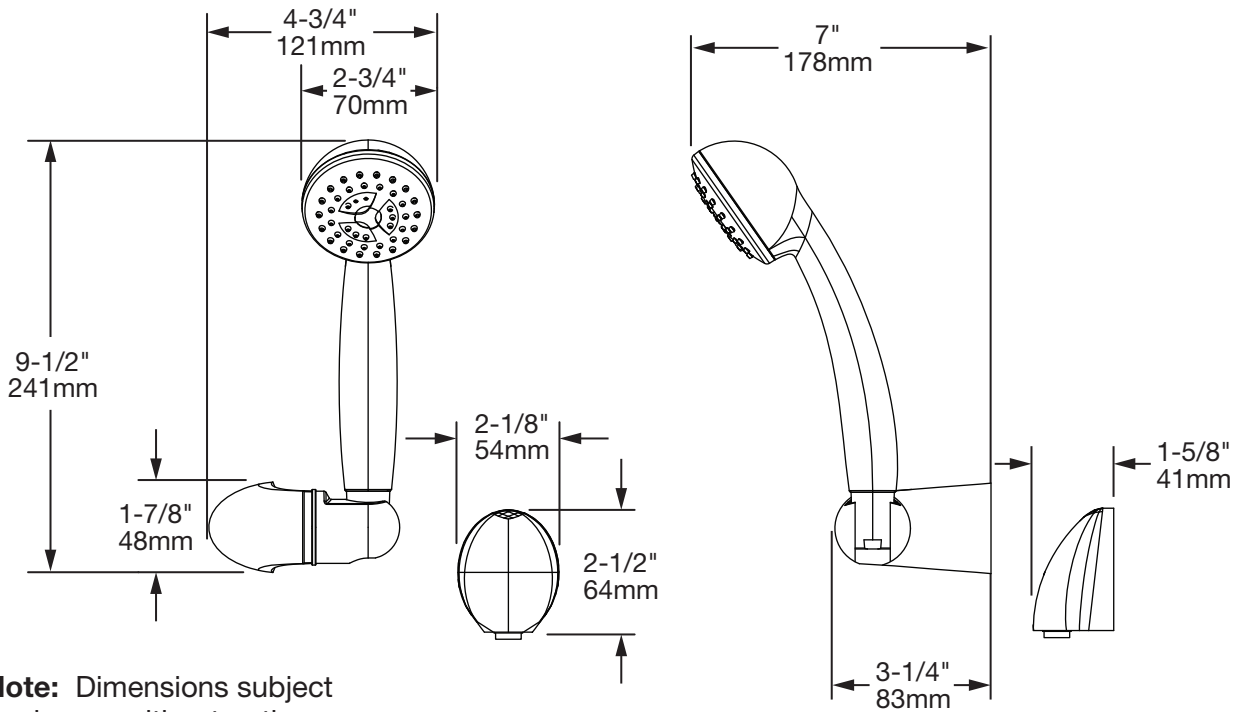

**Note:** Dimensions subject to change without notice.

Symmons Industries, Inc. ■ 31 Brooks Drive ■ Braintree, MA 02184  
 Phone: (800) 796-6667 ■ Fax: (800) 961-9621  
 Website: symmons.com ■ Email: gethelp@symmons.com

**SYMMONS**<sup>®</sup>  
 the smart choice<sup>™</sup>

Copyright © 2018 Symmons Industries, Inc. ■ ZV-1783 REV C ■ 102918