



Z6930-XL

AquaSense Battery Powered Faucet



Flow Control Options

- ☐ -F 0.5 gpm/1.9 Lpm Vandal-Resistant Non-Aerated
- ☐ -J* 1.5 gpm/ 5.7 Lpm Vandal-Resistant Laminar Flow
- ☐ -K* 1.0 gpm/ 3.8 Lpm Vandal-Resistant Laminar Flow
- ☐ -L* 1.0 gpm/ 3.8 Lpm Vandal-Resistant Aerator
- ☐ -M 0.35 gpm/1.3 Lpm Vandal-Resistant Non-Aerated
- ☐ -N 0.5 gpm/ 1.9 Lpm Vandal-Resistant Laminar Flow

Power Supply Choices (Sold Separately)

- ☐ -ACA 6 VDC Plug-In Power Converter
- ☐ -HW6 Hardwired Power Converter

Optional Power Supply Accessories

- ☐ -CWB Connector Wire for Hardwire Install
- ☐ -MJ Mini Junction Box

NOTE: For Hardwire applications furnish P6000-HW6 power converter. Order P6000-HW6 power converter separately.
The P6000-HW6 and P6000-MJ will power up to 8 sensor faucets.

Architectural/Engineering Approval

The information contained in this document is subject to change without notice.
Please contact Zurn for most up to date information.

ZURN INDUSTRIES, LLC. ♦ COMMERCIAL BRASS OPERATION
5900 ELWIN BUCHANAN DRIVE ♦ SANFORD NC 27330
PHONE: 1-800-997-3876 ♦ FAX: 919-775-3541
WWW.ZURN.COM
IN CANADA: ZURN INDUSTRIES LIMITED
7900 GOREWAY DRIVE UNIT 10 ♦ BRAMPTON, ONTARIO L6T5W6
PHONE: 905-405-8272 FAX: 905-405-1292

AquaSense® is a registered trademark of Zurn Industries, LLC.

Engineering Specification

ADA compliant, battery powered, chrome plated sensor faucet for retrofit and new construction.

- Flow Rate
1.5 gpm Vandal Resistant Aerator (-E*)
- Occupant Detection
Infrared convergence-type proximity sensor
Thirty Second Time out feature
- Spout module
Chrome Plated Cast Brass
- Also Includes
In-line filter
4 "AA" batteries
Inlet for a 1/2"[13] ball riser

Accessories

- ☐ -ADM Above Deck Mixer
- ☐ -ADM-2 Above Deck Mixer w/8" Cover Plate
- ☐ -CP4 Cover Plate 4"[102] Centers
- ☐ -CP8 Cover Plate 8"[203] Centers
- ☐ -DSA Drug Screening Applications (Hardwired Applications)
- ☐ -H4 Wrist Blade Handle for ADM
- ☐ -MT Mixing Tee
- ☐ -MV Temperature Mixing Valve
- ☐ -SH Supply Hoses for Mixing Valve
- ☐ -SSH Single Stainless Supply Hose (-XL)
- ☐ -TMV Thermostatic Mixing Valve for Multiple Faucets
- ☐ -TMV-1 Thermostatic Mixing Valve for Single Faucets
- ☐ -_____ Other




* This product should be used with a WaterSense labeled counterpart with a compatible flush volume to ensure that the entire system meets the requirements for water efficiency and performance.

Zurn Lead Free products (-XL) is the line of durable, high quality brass faucets and fixtures that are designed and manufactured to comply with Section 1417 of the Safe Drinking Water Act (SDWA) which mandates the weighted average lead content of no more than 0.25% of the wetted surface.

TYPICAL Z6930


AquaSense Battery Powered Faucet

NOTE: Recommended through hole diameter to properly mount the spout/shank is 1-1/8" to 1-1/4".

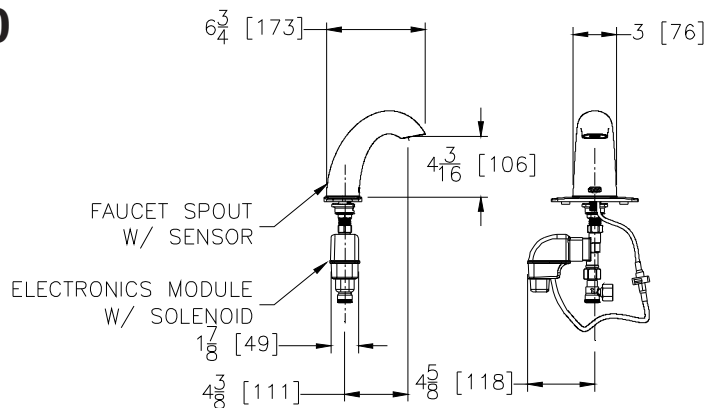


TYPICAL Z6930-ACA


AquaSense Plug-In Powered Faucet

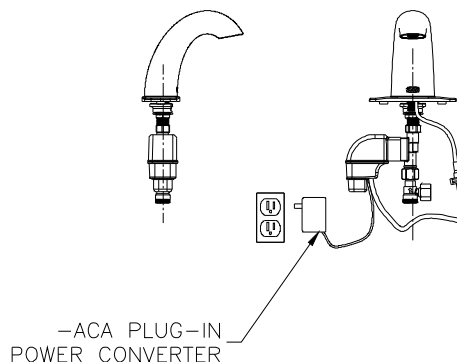

Optional Mixing Valves



P6900-MT
Mixing Tee



P6900-MV
Temperature Mixing Valve

TYPICAL Z6930-CWB

AquaSense Hardwire Powered Faucet

Optional:

* Optional -MJ mini junction box for connecting up to 8 faucets

NOTE: MUST USE EITHER ZURN P6000-HW6 HARDWIRE POWER CONVERTER OR ZURN P6000-ACA PLUG-IN POWER CONVERTER TO ENSURE PROPER OPERATION. USING A POWER CONVERTER OTHER THAN ZURN MAY RESULT IN OPERATION MALFUNCTION OR UNIT FAILURE.

