


Injection Mixing Pump Kit – QHMPK-


Circulator Included Specification Sheet Tag _____

Dimensional Data: Inches and [mm] are subject to manufacturing tolerances and change without notice.

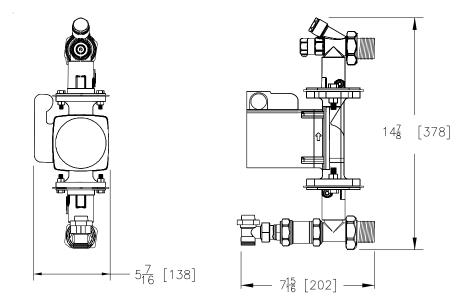

		Pump Specifications						
Part Number	Description	Volts	Amps	Watts	HP			
QHMPK-L	Low Head Pump, Injection Mixing Kit	115	0.74	85	1/25			
QHMPK-M	Medium Head Pump, Injection Mixing Kit	115	1.7	185	1/12			
QHMPK-H	High Head Pump, Injection Mixing Kit	115	2.15	245	1/6			

Engineering Specification: Zurn Injection Mixing Pump Kit. Kit includes UL approved cast iron circulator pump, isolation flange assemblies, supply valve, and return valve (not shown).



Accessories QHMTCK

QHAF-2 QHAF-3

QHAF-4 QHAF-5

QHAF-6

QHAF-7

QHAF-8

QHAF-9

QHAF-10 QHAF-11

QHAF-12

Thermostatic Control Kit

2 Port 1" AccuFlow® Manifold with Bracket(s)
3 Port 1" AccuFlow® Manifold with Bracket(s)
4 Port 1" AccuFlow® Manifold with Bracket(s)
5 Port 1" AccuFlow® Manifold with Bracket(s)
6 Port 1" AccuFlow® Manifold with Bracket(s)
7 Port 1" AccuFlow® Manifold with Bracket(s)
8 Port 1" AccuFlow® Manifold with Bracket(s)
9 Port 1" AccuFlow® Manifold with Bracket(s)
10 Port 1" AccuFlow® Manifold with Bracket(s)
11 Port 1" AccuFlow® Manifold with Bracket(s)
12 Port 1" AccuFlow® Manifold with Bracket(s)

Head Loss (FT-H2O) at Specified Flow Rate per Pump Size																	
Flow GPM	0	2	4	6	8	10	12	14	16	18	20	22	24	26	28	30	32
QHMPK-L	14.8	13.9	12.4	10.7	9.02	7.44	5.7	3.62	1.18								
QHMPK-M	24.1	23.8	23.4	22.4	21.3	19.3	17.2	14.9	12.6	10.9	9.1	7.5	5.8	4.4	2.9		
QHMPK-H	31.9	31.3	30.6	29.3	28.0	26.2	24.4	22.7	20.9	18.7	16.5	14.2	11.9	9.3	6.6	4.3	2.0
Rev. B Date: 4/30/09 C.N. No. 99											99950						

Date: 4/30/09 C.N. No. 99950 Dwg. No. 83610 Prod. No. QHMPK-

ZURN PEX® PLUMBING AND RADIANT HEATING SYSTEMS HWY 11 EAST, COMMERCE, TX, U.S.A. 75429 PHONE: 800/872-7277 FAX: 800/209-2148 WEBSITE: www.zurn.com IN CANADA: ZURN INDUSTRIES LIMITED 3544 NASHUA DRIVE, MISSISSAUGA, ONTARIO L4V 1L2 PHONE: 905/405-8272 FAX: 905/405-1292