



Location:

4702-TRM, 4702TRMTC  
Tub/Shower Trim  
Specification Submittal



### Feature Highlights

- Allura Tub/Shower Trim
- Requires Temptrol® Pressure Balancing Tub/Shower Valve
- Metal lever handle
- 5-1/2" diverter tub spout
- 3 mode showerhead
- 2.5 gpm (9.5 L/min) flow restrictor
- Components shall be metal and nonmetallic construction, plated in standard Polished Chrome finish
- Available with TA-10 flow control spindle and T-12A cap assembly for Temptrol valve bodies installed with Test Cap (order p/n 4702TRMTC)

### Model Numbers

- 4702-TRM**  
Tub/Shower Trim, Temptrol Pressure Balancing Tub/Shower Valve ordered separately
- 4702TRMTC**  
Tub/Shower Trim with TA-10 flow control spindle and T-12A cap assembly, must order Temptrol valve with Test Cap

### Compliance

- ASME A112.18.1/CSA B125.1



### Warranty


**Limited Lifetime** - to the original end purchaser in consumer/residential installations.  
**5 Years** - for industrial/commercial installations.  
Refer to [www.symmons.com/warranty](http://www.symmons.com/warranty) for complete warranty information.  
Go to [www.symmons.com/register](http://www.symmons.com/register) to register your Symmons product.

### Options/Modifications

- 1.5**  1.5 gpm (5.7 L/min) flow restrictor
- 2.0** 2.0 gpm (7.6 L/min) flow restrictor
- EX** Exposed column/slide bar, hand shower bracket and hand shower wand (35EX)
- L1** Less showerhead
- LAM**  Metal finish insert handle
- LR**  Lever handle
- REB** Rebuild trim kit, includes TA-10 and TA-4
- SS** Slip spout on any tub/shower unit
- VP** Vandal resistant escutcheon screws in place of standard screws
- STN** Satin Nickel finish

**Note:** Append appropriate -suffix to model number.

## Dimensions

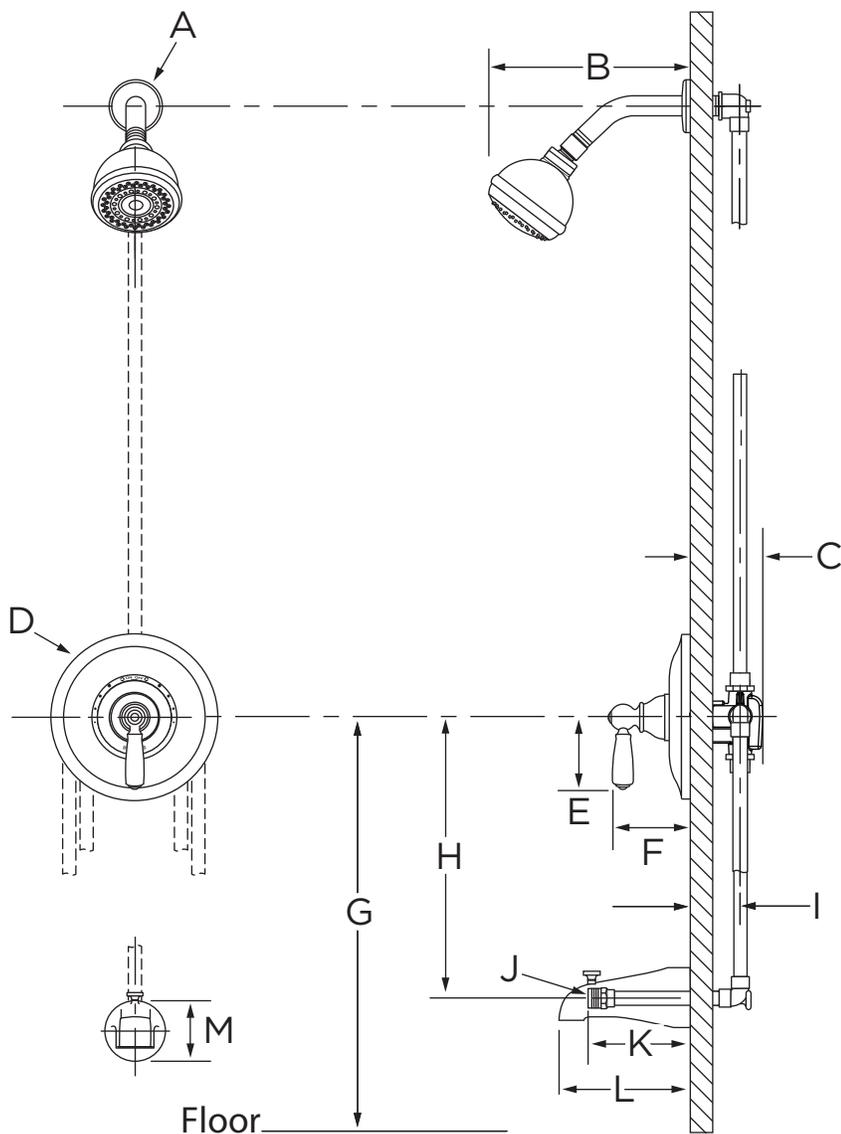

Measurements	
A	Ø 2-1/2", 64 mm
B	6-3/4", 172 mm
C	3-1/2", 89 mm
D	Ø 7", 178 mm
E	3-1/8", 79 mm
F	4", 102 mm
G	Ref. 32", 813 mm
H	Ref. 12", 305 mm
I	Rough-in 2-3/8" ± 1/2", 60 mm ± 13 mm
J	1/2" NPT
K	4", 102 mm
L	5-1/2", 140 mm
M	2-1/2", 64 mm

### Notes:

- 1) Valve body and piping not included and shown as reference only.
- 2) Plaster shield (p/n T-176) for dry wall, plaster or other type walls 1/2" or greater.
- 3) All dimensions measured from nominal rough-in (see I as reference).
- 4) Dimensions subject to change without notice.